

Barber Coleman 7 Series F to C

Configuration:

- 1) Remove Control from the case.
- 2) Open switch V2 and install control back into the case.
- 3) Press *Function* key to scroll through parameter.
- 4) Press *Raise* or *Lower* key to change parameter.

Parameter List

P1	=	9
P2	=	0
P3	=	999
P4	=	r
P5	=	5
P6	=	oil
P7	=	n/a
P8	=	n/a
P9	=	0
P10	=	0
P11	=	10
P12	=	10
P13	=	n/a

Change to 1

Change to 800

- 5) Press *Function* key.
- 6) Press *Raise* or *Lower* key and enter 219.
- 7) Press *Function* key

P14	=	off
P15	=	1
P16	=	30.0
P17	=	1.0
P18	=	1.5
P19	=	on
P20	=	0.3
P21	=	10

End of configuration mode.

OVER


- 8) Remove control from case.
- 9) Close switch V2 and install control back into the case.
- 10) Press *Raise* or *Lower* key for normal display operation mode.
- 11) Press *Function* key between each parameter.

SP	=	4-121
nnn	=	on
AL	=	n/a
Pb	=	4.0
HS	=	1.0
Ti	=	4
Td	=	1
ip	=	0
c	=	60
c2	=	5
rc	=	1.0
oLp	=	0
rL	=	40
rH	=	250
oLH	=	100
toL	=	1nf


Enter 10

Change to 4
Change to 121

- 12) **Return to nnn- enter 2 to change nnn to ON. Press Function key for normal display**
- 13) To Auto Tune:
 - a) Raise set point to 121 degrees C - wait 3 seconds -
 - b) Push and hold *Auto Tune* key until Auto Tune light flashes. Auto Tune light will light solid when tuning is complete.
 - c) Push and hold the *Auto Tune* key until the Auto Tune light goes out.

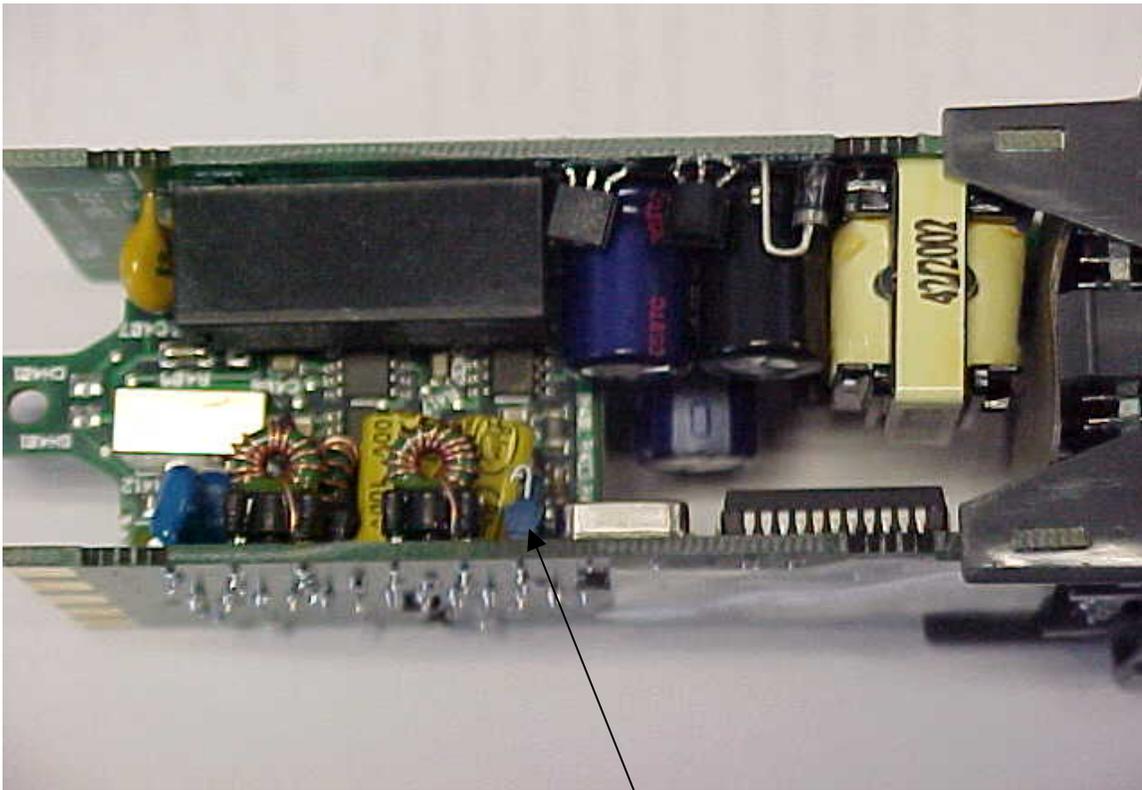

V2 switch

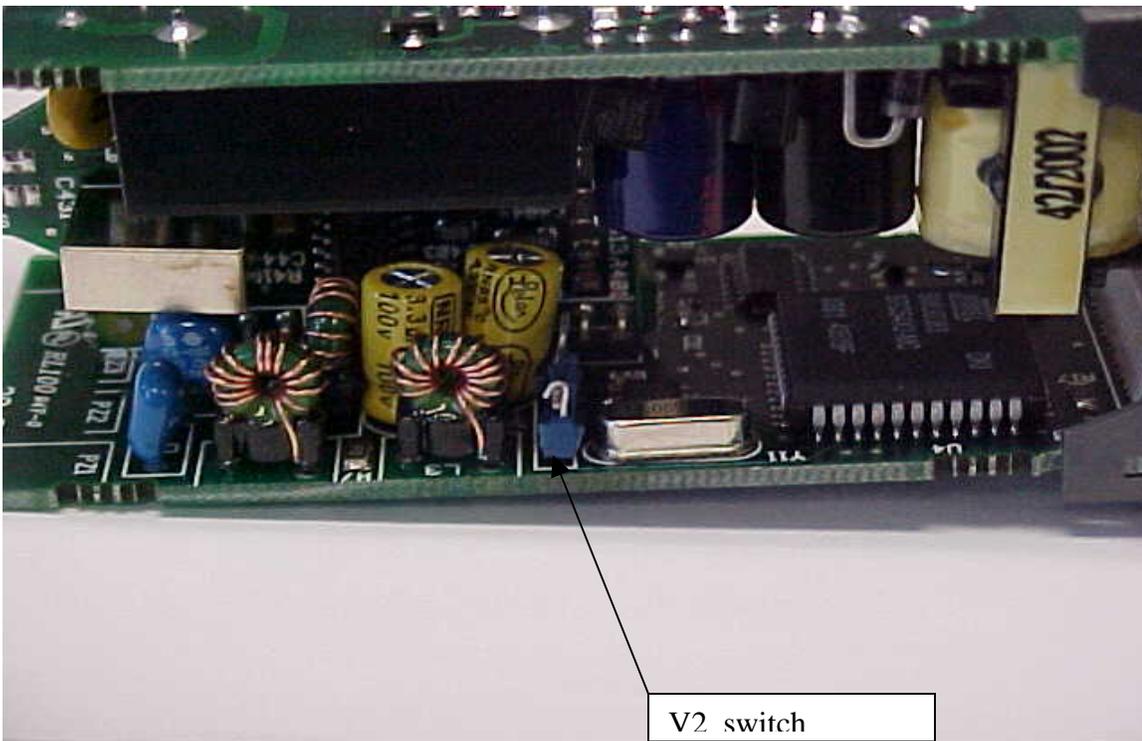

V2 switch